



安装外形图 Overall dimension

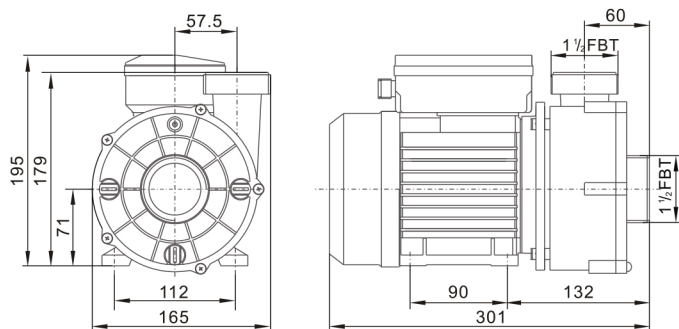


性能曲线 Performance curves

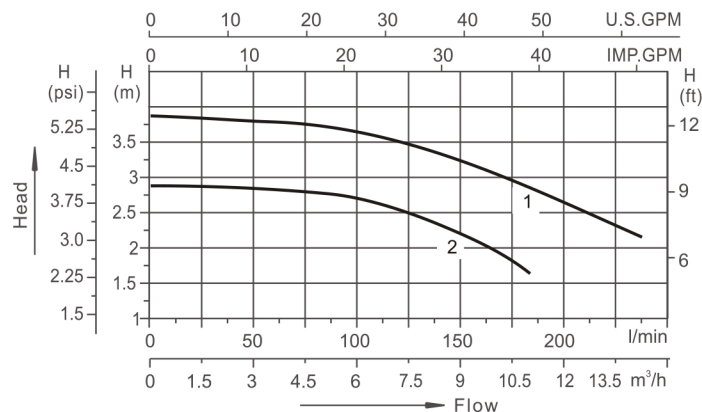

EN 60335-1: 2012+A11
EN 60335-2-41: 2003+A1+A2
EN 60335-2-60: 2003+A1+A2+A11+A12
EN 62233 : 2008
ERP547/2012



UL1795: SEPTEMBER 22, 2006



海水养殖循环过滤
Mariculture circulation filter



浴缸水循环
Recirculation of water in Bathtub pump




SPA池水循环
Recirculation of water in SPA equipment

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max. working pressure: 0.3MPa

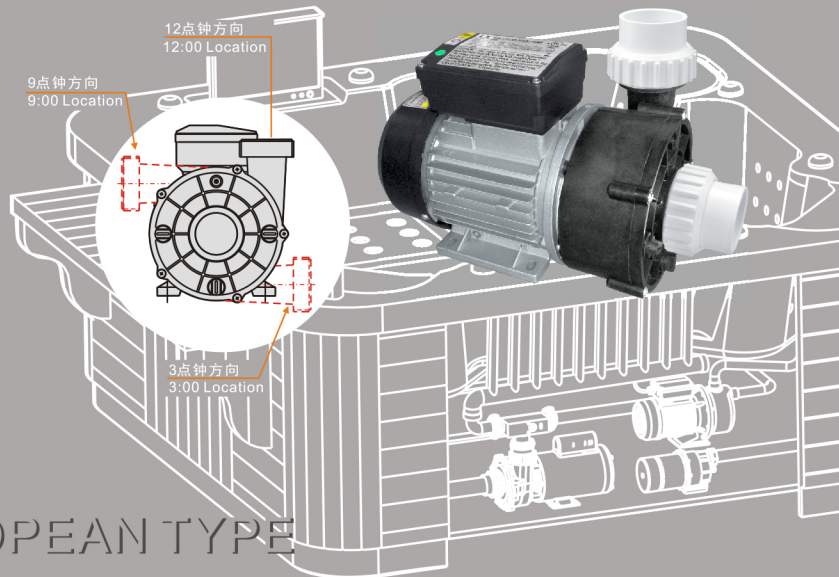

欧洲款
EUROPEAN TYPE

技术参数列表 Technical parameter list

型 号 Model	电压/频率 V/Hz	转 速 speed (r/min)	输入功率 Power(P ₁) kW HP		电流 Amps	最大流量 Q _{max} (l/min)	最大扬程 H _{max} (m)	曲线 Curves	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)	认证 Recognize certified
WTC50M	230/50	1400	0.25	0.35	1.0	240	3.8	1	48.5or50	6.0	330×180×255	TUV/CE
WTC50M	230/60	1700	0.25	0.35	1.0	240	3.8	1	48.5or50	6.0	330×180×255	UL
WTC50M	230	50	1400	0.18 0.25	0.8	180	2.8	2	48.5or50	6.0	330×180×255	
		60	1700	0.25 0.35	1.0	240	3.8	1				

230V/60Hz, 110V/60Hz, 110V/50Hz models are available on request

序号 NO.	名称 Name
1	接头螺母 Tie-in Nut
2	接头 Tie
3	O形圈 O-Ring
4	十字盘头螺钉和平垫圈组合件 cross recessed pan head screw and washer assemblies
5	泵盖 Pump Cover
6	叶轮 Impeller
7	机械密封 Mechanical seal
8	O形圈 O-Ring
9	泵壳 Pump Casing
10	电机 Motor

